

# SLP (UK) LTD


## 2mm Opal Frosted Acrylic

Light Output Ratios	Up	0.00
	Down	0.72
	Total	0.72

Spacing to Height Ratios	SHR NOM	1.25
	SHR MAX	1.39

Utilisation Factors UF(F) Standard Presentation SHR NOM = 1.25

Room Reflectances			Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
.70	.50	.20	.42	.49	.54	.58	.63	.67	.69	.72	.74	
	.30		.36	.44	.49	.53	.59	.63	.66	.70	.72	
	.10		.32	.40	.45	.49	.55	.60	.63	.67	.70	
.50	.50	.20	.41	.48	.53	.56	.61	.64	.67	.70	.71	
	.30		.36	.43	.48	.52	.57	.61	.64	.67	.69	
	.10		.32	.39	.45	.49	.54	.58	.61	.65	.68	
.30	.50	.20	.40	.46	.51	.54	.59	.62	.64	.67	.69	
	.30		.35	.42	.47	.51	.56	.59	.62	.65	.67	
	.10		.32	.39	.44	.48	.53	.57	.60	.63	.65	
.00	.00	.00	.30	.37	.42	.46	.51	.54	.57	.60	.62	
BZ	Class		4	4	4	4	4	4	4	4	4	

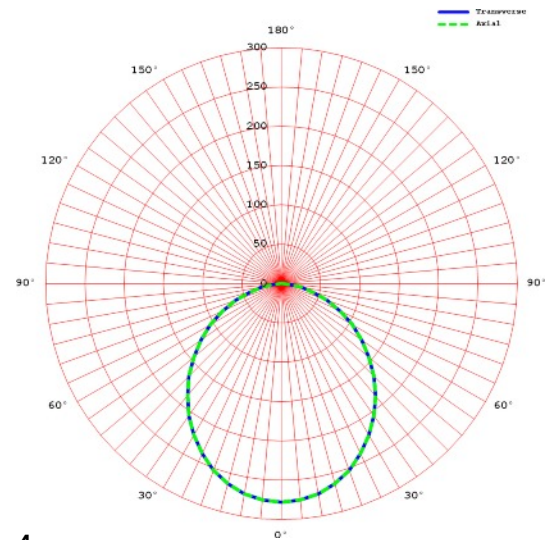

**Averaged Luminous Intensities (Cd)**  
**Elevation(°)                      Azimuth(°)**

	0.0°
0°	1224.6
5°	1216.8
10°	1194.8
15°	1158.5
20°	1110.3
25°	1049.5
30°	979.4
35°	902.3
40°	818.5
45°	731.6
50°	641.0
55°	549.0
60°	456.4
65°	364.3
70°	271.5
75°	183.7
80°	105.5
85°	42.8
90°	0.0