


SLP (UK) LTD

P25-ACR-LINEAR (THIN REED)

INTENSITY VALUES CANDELAS PER 1000 LUMENS

	0	15	30	45	60	75	90
0	273.27	273.27	273.27	273.27	273.27	273.27	273.27
5	272.65	272.54	272.39	272.18	272.06	271.94	271.92
10	271.32	270.99	270.38	269.56	268.91	268.38	268.15
15	270.48	269.80	268.01	265.75	263.84	262.57	262.02
20	270.52	269.18	265.62	261.28	257.35	254.68	253.61
25	269.36	267.53	262.99	256.41	249.67	245.25	242.84
30	267.23	264.89	258.18	249.80	240.78	233.13	230.89
35	256.29	253.80	247.54	239.89	230.28	219.24	216.36
40	206.57	211.29	212.29	207.43	211.32	203.30	199.15
45	143.99	147.51	157.40	162.97	162.24	181.32	179.96
50	118.58	116.47	111.04	125.22	125.39	140.86	154.42
55	69.82	75.84	90.34	87.06	102.83	106.03	116.61
60	56.98	56.32	49.82	69.14	68.32	78.27	86.24
65	43.40	39.81	42.02	39.36	49.19	58.94	58.90
70	33.89	32.10	35.64	32.98	31.82	37.19	37.60
75	29.91	28.02	27.84	25.18	22.83	23.07	22.26
80	23.28	21.79	20.12	17.27	14.13	11.94	10.88
85	18.20	16.00	10.69	8.15	6.79	5.42	4.46
90	0	0	0	0	0	0	0

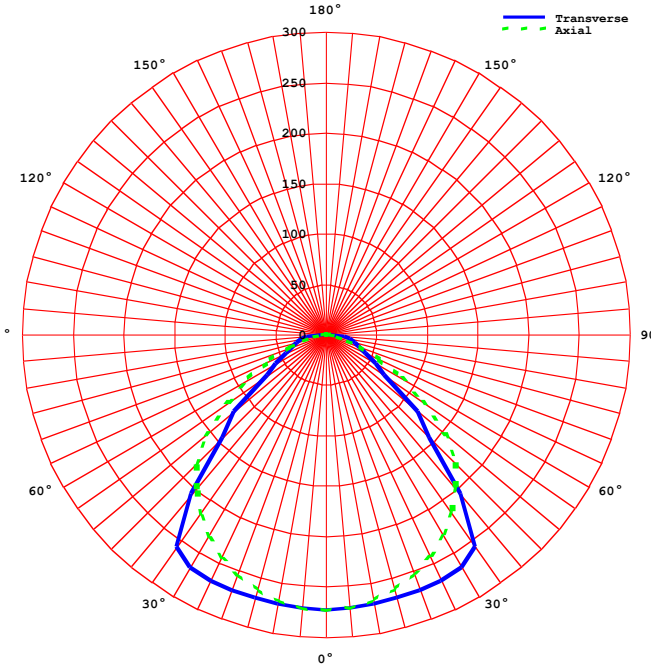

Spacing To Mounting Height Ratio

Nominal S/Hm.	1.50
Maximum S/Hm.	1.69
Maximum Transverse S/Hm.	1.80

Light Output Ratio's

Upward Light Output	ULOR	0%
Downward Light Output	DLOR	66.0%
Total	LOR	66.0%

Utilisation Factors for a Nominal S/Hm. of 1.5

			Room Index								
Ceiling	Walls	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
70%	50%	20%	0.45	0.51	0.55	0.58	0.62	0.64	0.66	0.69	0.70
	30%		0.41	0.46	0.51	0.54	0.58	0.61	0.64	0.66	0.68
	10%		0.38	0.43	0.48	0.51	0.56	0.59	0.61	0.64	0.67
50%	50%	20%	0.44	0.49	0.53	0.56	0.60	0.62	0.64	0.66	0.67
	30%		0.41	0.46	0.50	0.53	0.57	0.60	0.62	0.64	0.66
	10%		0.38	0.43	0.47	0.50	0.55	0.58	0.6	0.63	0.65
30%	50%	20%	0.44	0.48	0.52	0.55	0.58	0.60	0.62	0.64	0.65
	30%		0.40	0.45	0.49	0.52	0.56	0.58	0.60	0.62	0.64
	10%		0.38	0.42	0.47	0.50	0.54	0.56	0.58	0.61	0.63
0%	0%	0%	0.36	0.41	0.45	0.48	0.51	0.54	0.56	0.58	0.59
BZ CLASSIFICATION			2	2	2	2	3	2	3	3	3

All Photometry conducted in accordance to BS5225:Part 1:1975

Calculations conducted to CIBSE TM5 & TM10

Uncorrected Glare Indices available upon request